






* For a correct installation, first of all the evenness of the wall on which the installation will be made and the suitability of the wall dimensions with the cabinet should be checked. Take the cabinet out of the packing smoothly, and place the product packing beneath the product in order to prevent any damages.


* Start the installation from the top cabinet first because the lower cabinet may suffer damage during installing the top cabinet.

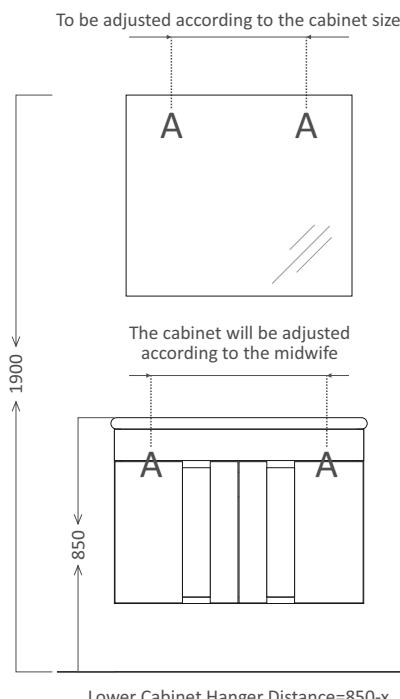

Ensuring that the top distance of the cabinet is 190-cm from the floor, the place corresponding to the suspension mechanism on the wall will be calculated. The value (a) may vary depending on the cabinet dimensions.

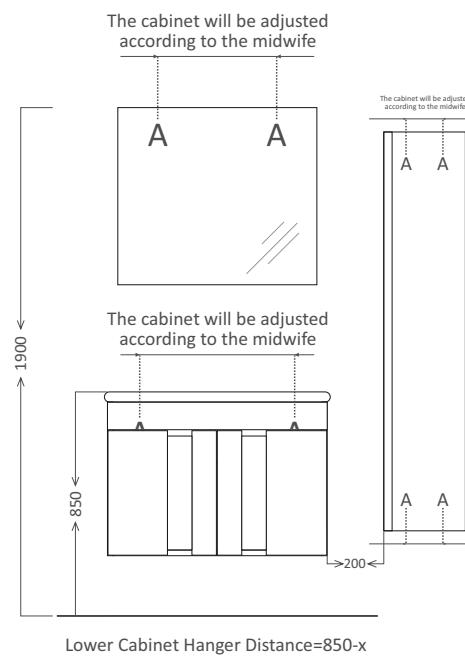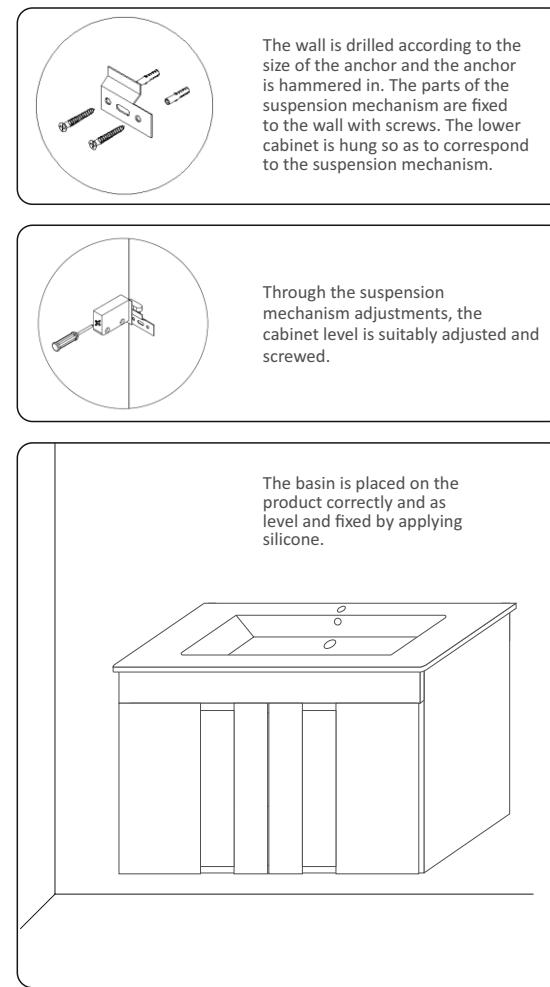

Ensuring that the bottom distance of the length cabinet is equal to the distance of the lower cabinet, the place corresponding to the suspension mechanism on the wall is calculated. A distance of 20-25 cm may be left between the length cabinet and the cabinet.



The anchor is fixed to the wall so as to correspond to the suspension mechanism of the length cabinet. The cabinet is fixed so that the cabinet suspension corresponds with the anchors. The cap of the suspension mechanism is covered.



* **Doğru bir montaj için öncelikli olarak montaj yapılacak duvarın düzgünliği ve dolaba göre duvar ebatlarının kontrolü yapılmalıdır. Dolaplar düzgün bir şekilde kutudan çıkarılarak ürünün altına zarar görmemesi için ürünün paketini koyunuz.**

* **Montaja öncelikli olarak üst dolaptan başlayınız zira üst dolap montajı sırasında alt dolap zarar görebilir.**

